


Transporting Doors and Windows Fixtures

DRILLEX®

SELF-DRILLING SCREW FOR TRANSPORTING
DOORS AND WINDOWS FIXTURES

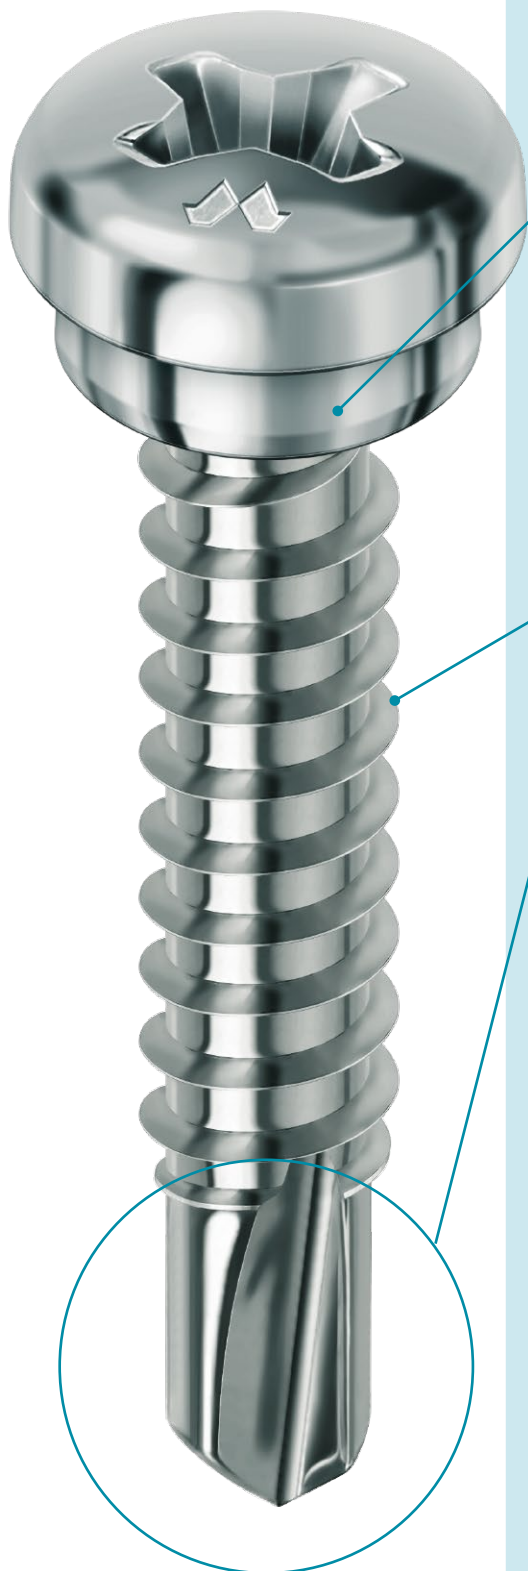

Self-drilling screw with a special head for **hooking belts** for transporting doors and window fixtures.

Head of a special shape, with a collar, to keep it screwed at a certain distance from the edge of the profile, so as to allow the hooking of the handle for transport of the window and door to the work site.



Self-tapping thread for anchoring to the metal reinforcement of the window and door frame.

Tip 'Drillex®' self-drilling tip, to drill the plastic wall and metal reinforcement of the window and door.

CARBONITRIDING HEAT TREATMENT

This confers two properties to the screw:

- **very hard surface**, for biting into the fibres of the hardest wood;
- **tough, elastic core**, needed to avoid breakage of screws.


CHROMITING® PROTECTIVE TREATMENT



Chromiting® treatment has a much **higher corrosion resistance** than that of **white or yellow galvanizing**. It can be used for applications both indoors and outdoors and **respects the environment in compliance with the RoHS, Reach and 2000/53/EU standards**.



DRILLEX® FOR TRANSPORTING
DOORS AND WINDOWS
FIXTURES

CHROMITING®
SPECIAL HEAD - PH Recess



	Cod. Mustad	D (mm)	L tot (mm)	L fil (mm)	Dt (mm)	Pcs. 	Pcs. 
PH 2	DX323A550220C8C	5,5	22	TOT	9,5	500	3000

