


CSK
Countersunk Head

FRAMEX® PVC
FOR PVC WINDOWS OR DOORS

Screw for **fixing hardware elements to profiles for PVC windows or doors**

Fixing hinges (1)


Fixing AR hardware (2)

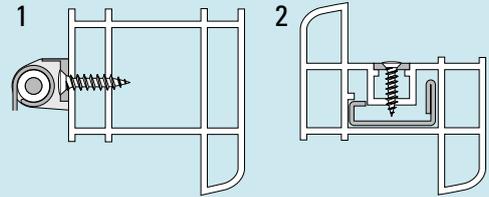


HEAD
with a small diameter (7 mm), for fixing hardware elements and hinges.



RECESS
with deep PH2 cross, to guarantee excellent coupling with the tightening tip, thus considerably reducing consumption.

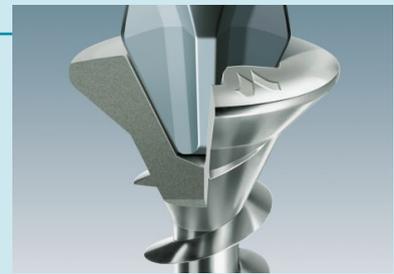

THREAD
with a diameter of 4.3 mm having a special profile for PVC, to guarantee a high resistance to tear and stripping. The thread right to the head ensures a better grip of the outer wall of the profile.

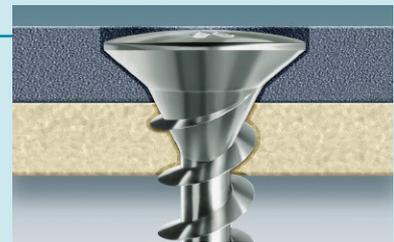

TIP
threaded right to the end, to self-tap the material rapidly, cutting its fibres without having to apply high pressures.


CHROMITING® PROTECTIVE TREATMENT
Chromiting® treatment has a much higher corrosion resistance than that of white or yellow galvanizing. It can be used for applications both indoors and outdoors and respects the environment in compliance with the RoHS, Reach and 2000/53/EU standards.



CARBONITRIDING HEAT TREATMENT

This confers two properties to the screw:

- **very hard surface**, for biting into the fibres of the hardest wood;
- **tough, elastic core**, needed to avoid breakage of screws.

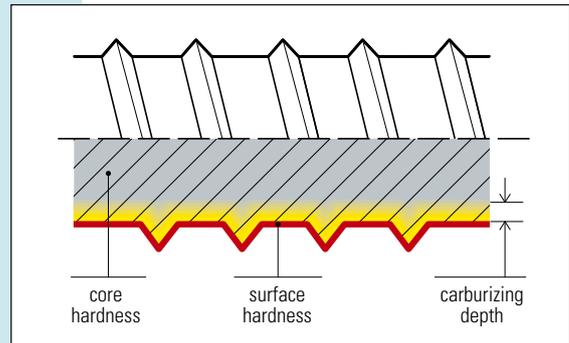

IN PROCESS CONTROLS


The entire manufacturing process is subjected to **SPC (Statistical Product Control)**, which guarantees a **constantly high level of quality in time**.

The batch number on the labels ensures **absolute traceability** of all the phases of production and related control/test documents.




CALIBRATED SCREWS

FrameX[®] PVC screws are manufactured **in compliance with stricter-than-standard tolerance limits**. They can therefore be defined 'calibrated', i.e. capable of sliding more easily in the guides and tubes for loading screwing machines.

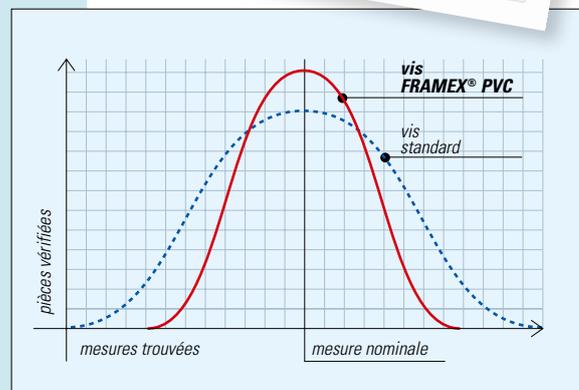

AUTOMATIC SCREWING MACHINES


The set of characteristics illustrated above, together with a production process completely under control, make the **FrameX[®] PVC** screws suitable for **automated and critical screwing operations**.

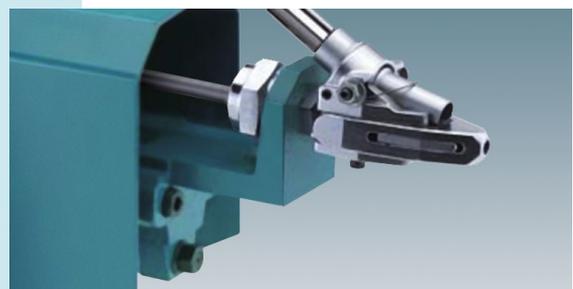

FRAMEX® PVC

CHROMITING®

CSK - Countersunk Head - PH Recess



| | Cod. Mustad | D (mm) | L tot (mm) | L fil (mm) | Dt (mm) | Pcs.  | Pcs.  |
|---|-----------------|-----------|---------------|---------------|------------|---|---|
| PH 2  | SP436A430160C8C | 4,3 | 16 | TOT | 7 | 1000 | 10000 |
| | SP436A430200C8C | 4,3 | 20 | TOT | 7 | 1000 | 6000 |
| | SP436B430220C8C | 4,3 | 22 | TOT | 7 | 1000 | 6000 |
| | SP436A430250C8C | 4,3 | 25 | TOT | 7 | 1000 | 6000 |
| | SP436B430275C8C | 4,3 | 27,5 | TOT | 7 | 1000 | 5000 |
| | SP436A430300C8C | 4,3 | 30 | TOT | 7 | 1000 | 7000 |
| | SP436A430350C8C | 4,3 | 35 | TOT | 7 | 1000 | 7000 |
| | SP436A430400C8C | 4,3 | 40 | TOT | 7 | 500 | 5500 |
| | SP436A430450C8C | 4,3 | 45 | TOT | 7 | 500 | 4500 |
| | SP436A430550C8C | 4,3 | 55 | TOT | 7 | 500 | 3500 |