


CLIP

FRAMEX® CLIP®

FOR ADJUSTABLE POSITIONING OF THE PVC
OR ALUMINIUM WINDOW OR DOOR

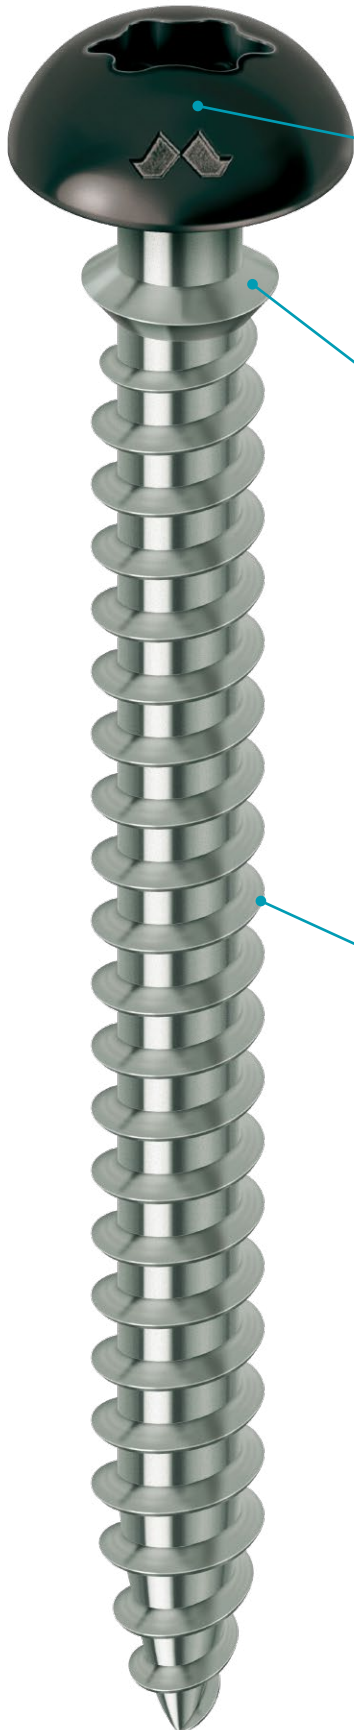

Special screw for **adjustable positioning of the PVC or aluminium window or door on a wooden or metal counterframe.**


Large head to guarantee easy screwing and an excellent tightening pressure. **Deep TX six lobe recess** due to its vertical walls, transmits all its tightening torque thus preventing stripping of the bit and wear of the recess.

BLACK HEAD LACQUERING - RAL 9005

with **thermosetting powders** to guarantee **perfect adhesion** to the surface of the head.

Collar with a larger diameter than the thread:

it hooks the outer wall of the PVC profile, or the polyamide bar of the aluminium profile, fixing it to the screw (see fig. 1) and allowing an **axial adjustment of the window or door** by tightening and loosening it (see fig. 2).

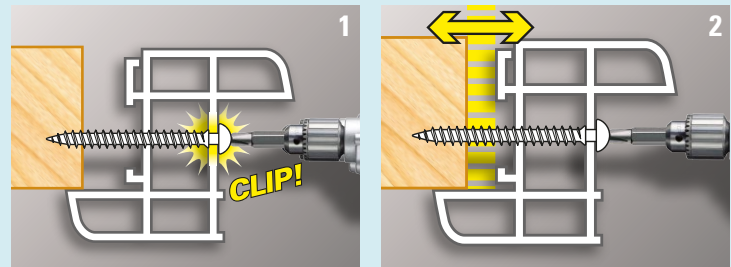

Aggancio della gola.

Regolazione della posizione del serramento tramite avvitarmento e svitarmento della vite.

Thread for wood and thin sheet metal.

CARBONITRIDING HEAT TREATMENT

This confers two properties to the screw:

- **very hard surface**, for biting into the fibres of the hardest wood;
- **tough, elastic core**, needed to avoid breakage of screws.

CHROMITING® PROTECTIVE TREATMENT

Higher corrosion resistance than that of white or yellow galvanizing. It can be used for applications both indoors and outdoors and **respects the environment in compliance with the RoHS, Reach and 2000/53/EU standards.**




LUBRICATION **LUBEX®**

MUSTAD antifriction treatment for **reducing fastening force by up to 50%**, and facilitate the screwing and unscrewing operations necessary during the window adjustment phase.



FRAMEX® CLIP

CHROMITING® BLACK LACQUERED
CLIP - TX Recess RAL 9005



Cod.	D	L tot	L fil	Dt	Pcs.	Pcs.
Mustad	(mm)	(mm)	(mm)	(mm)		
SP305A60070035C	6	70	TOT	11	100	1500

TX 25

