HEXAGONAL HEAD

KOVERVIT® AA

HARDENED HEXAGONAL HEAD SCREW FOR WOOD

Screw for fixing various conglomerates, laminated wood, chipboard panels, wood-metal "sandwich" structures, fibreglass and thin sheet metal, to wood without a pilot hole.

HEXAGONAL HEAD K10

sharp-edged to guarantee a high transmission of the screwing torque.

AA LARGE PITCH THREAD

for quick screwing, ideal for wood and light structures.

30° ANGLE POINTED TIP

suitable for penetrating easily into any low-density material. The thread right to the end and the hardness of the steel allow **direct drilling of the roofing sheets**, thus eliminating the need for a pilot hole.

CASE HARDENING TREATMENT

This confers two properties to the screw:
- **very hard surface**, for biting into the fibres of the hardest wood;
- **tough, elastic core**, needed to avoid breakage of screws.

The breaking resistance is double compared to a common wood anchor bolt, even if with a larger diameter.

CHROMITING® PROTECTIVE TREATMENT

Higher corrosion resistance than that of white or yellow galvanizing. Respects the environment in compliance with the RoHS, Reach and 2000/53/EU standards.

LUBRICATION LUBEX®

MUSTAD antifriction treatment for **reducing fastening force by up to 50%** compared to a common wood anchor bolt, even with a smaller diameter.

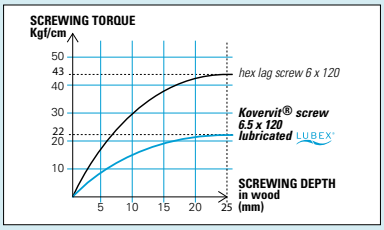

CE MARKING

CE
EN 14592 : 2012

For the assembly elements for constructing wooden weight-bearing structures, in accordance with the **EN 14592:2012 standard** (granted by the CSTB Centre Scientifique du Bâtiment, in Paris). Issue of the **DoP (Declaration of Performance)**, in accordance with the European Construction Regulation no. 305/2011.

MUSTAD
SCREWS TECHNOLOGY

KOVERVIT® AA

CHROMITING® - LUBRICATED LUBEX®

Hexagonal Head - For wood

EN 14592:2012



	Cod. Mustad	D (mm)	L tot (mm)	L fil (mm)	Dt (mm)	Pcs.	Pcs.
KE 10	KV811B650400C8C	6,5	40	TOT	14,8	200	3000
	KV811B650500C8C	6,5	50	TOT	14,8	100	1500
	KV811B650600C8C	6,5	60	TOT	14,8	100	1500
	KV811B650700C8C	6,5	70	60	14,8	100	1500
	KV811B650800C8C	6,5	80	60	14,8	100	1400
	KV811B650900C8C	6,5	90	60	14,8	100	1500
	KV811B651000C8C	6,5	100	60	14,8	100	1500
	KV811B651100C8C	6,5	110	60	14,8	100	700
	KV811B651200C8C	6,5	120	60	14,8	100	700
	KV811B651300C8C	6,5	130	60	14,8	100	700
	KV811B651400C8C	6,5	140	60	14,8	100	700
	KV811B651500C8C	6,5	150	60	14,8	100	700
	KV811B651600C8C	6,5	160	60	14,8	100	700
	KV811B651800C8C	6,5	180	60	14,8	100	700
	KV811B652000C8C	6,5	200	60	14,8	100	700